


Connect Belt



| Part # | Description |
|-------------|--|
| OSB-CB-17.5 | Connect Belt for Landscape, 5 Deg. Tilt, True South |
| OSB-CB-24 | Connect Belt for Landscape, 10 Deg. Tilt, True South |
| OSB-CB-27 | Connect Belt for Landscape, 15 Deg. Tilt, True South |

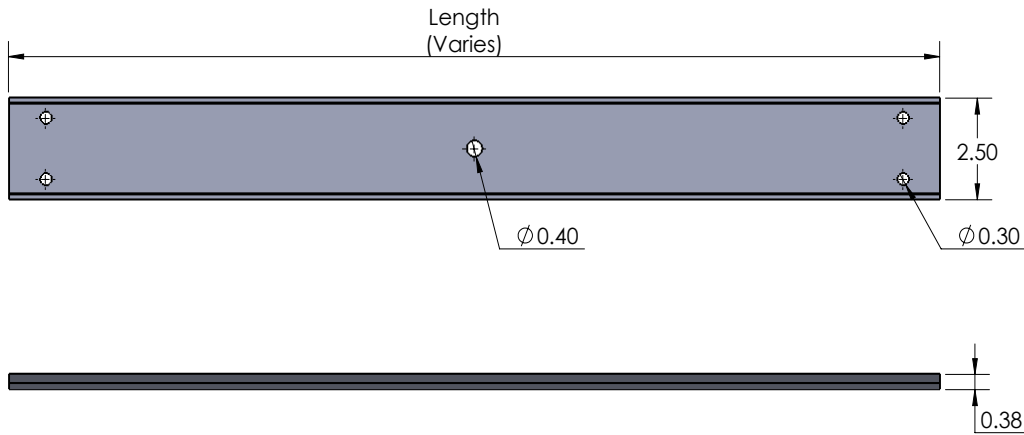

Features:


- Material: 5052 Aluminum
- Attachment ready for seismic plates or U-Anchor Products
- Weight:

| Part # | Weight (lbs) |
|-------------|--------------|
| OSB-CB-17.5 | 0.6 |
| OSB-CB-24 | 0.82 |
| OSB-CB-27 | 0.93 |



Connect Belt

Installation Overview

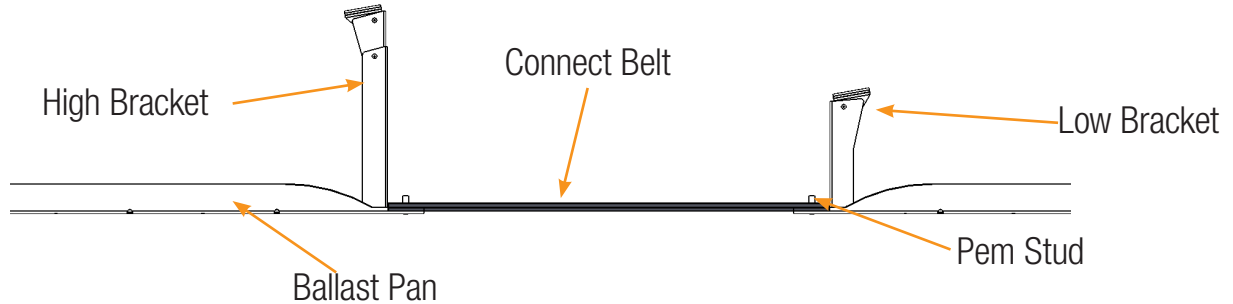

- First, use Connect Belt to measure out distances between Ballast Pan/Solar Belt (refer to full installation manual)
- Place brackets atop Ballast Pan/Solar Belts; place connect belt over brackets.
- When needed attach seismic plate or U-Anchor to connect belt and place atop brackets.
- Tighten Kep Nuts to 72 in-lbs.

Completed Install

