


Connect Belt



Part #	Description
OSB-CB-17.5	Connect Belt, Landscape 5", True South
OSB-CB-24	Connect Belt, Landscape 10", True South
OSB-CB-27	Connect Belt, Landscape 15", True South

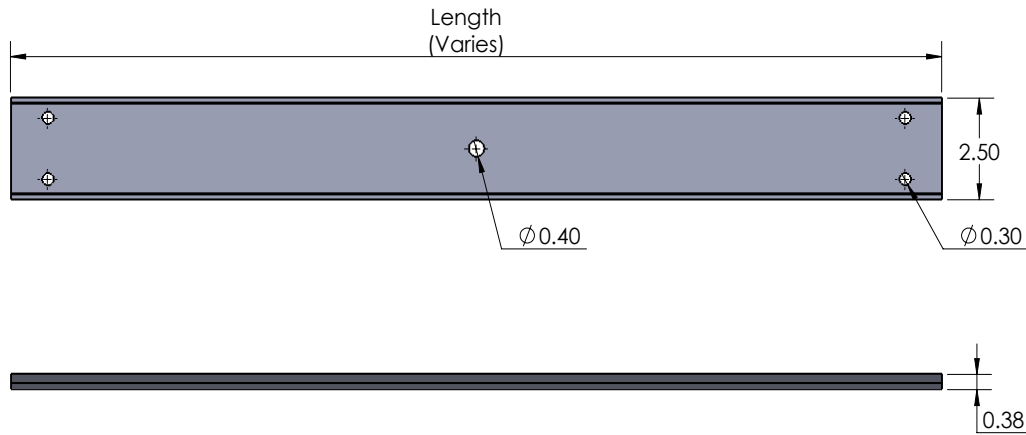

Features:


- Material: 5052 Aluminum
- Attachment ready for seismic plates or U-Anchor Products
- Weight:

Part #	Weight (lbs)
OSB-CB-17.5	0.6
OSB-CB-24	0.82
OSB-CB-27	0.93



Connect Belt

Installation Overview

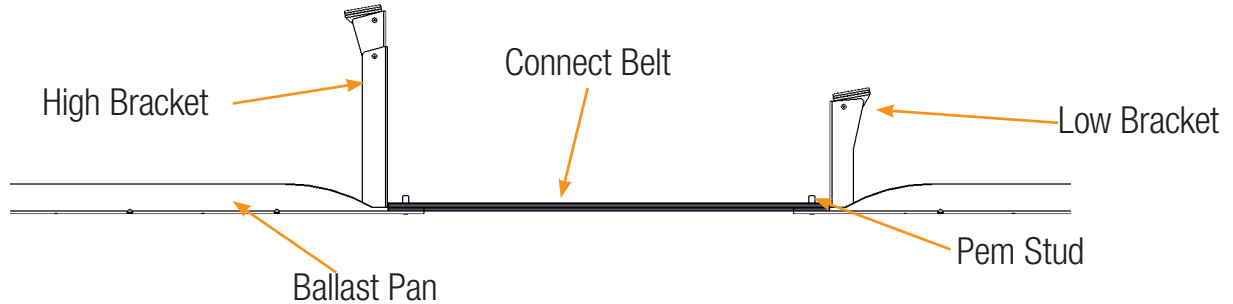

- First, use Connect Belt to measure out distances between Ballast Pan/Solar Belt (refer to full installation manual)
- Place brackets atop Ballast Pan/Solar Belts; place connect belt over brackets.
- When needed attach seismic plate or U-Anchor to connect belt and place atop brackets.
- Tighten Kep Nuts to 144 in-lbs.

Completed Install

